




顺晟制带  
Shun Sheng

## 工业输送带 Industry Belt

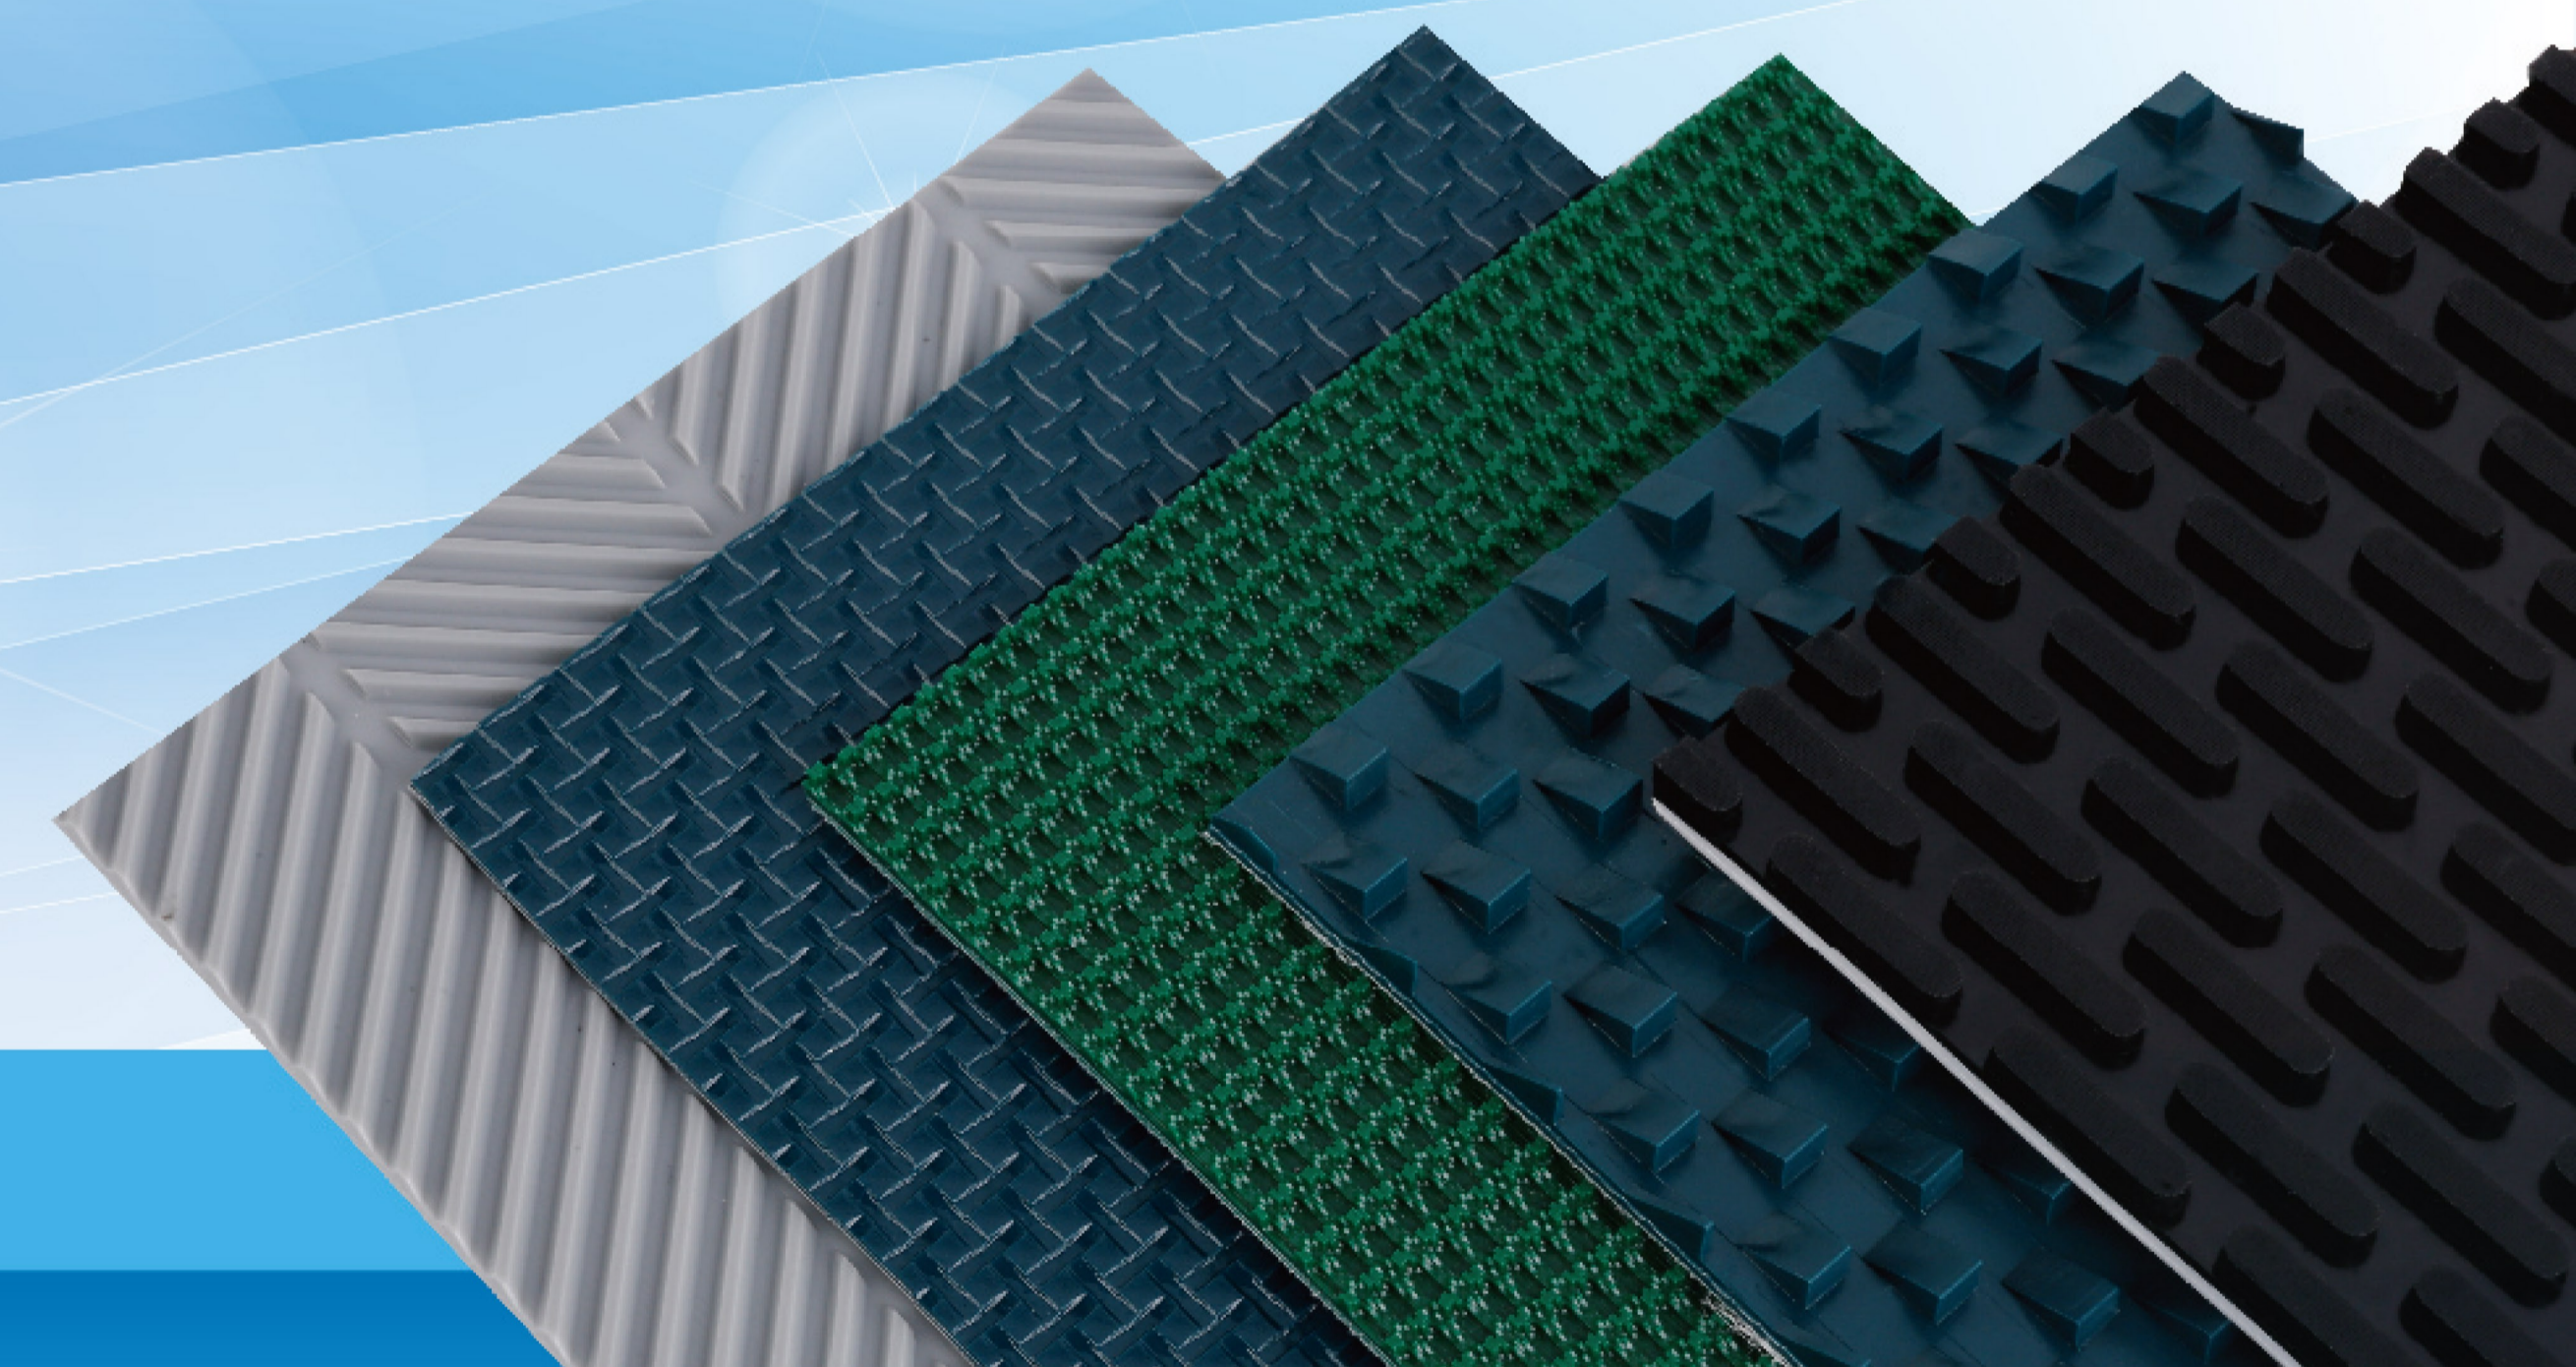


 **无锡市顺晟工业制带有限公司**  
Wuxi Shun Sheng Industry Belt Manufacturing Co.,Ltd

地址：无锡市惠山区洛社镇双庙工业园区枫杨路288号  
电话：0510-83312052 83320777  
传真：0510-83831318  
邮编：214154  
E-mail: [sszd@sszd.cn](mailto:sszd@sszd.cn)  
网址: <http://www.sszd.cn>  
Made-in-China 网址: <https://wxsszd.en.made-in-china.com>

Add: 288, Fengyang Road, LuoShe Development Zone,  
Wuxi, Jiangsu, China  
Tel: 0510-83312052 83320777  
Fax: 0510-83831318  
Post code: 214154  
Official E-mail: [sszd@sszd.cn](mailto:sszd@sszd.cn)  
Website: <http://www.sszd.cn>  
Made-in-China: <https://wxsszd.en.made-in-china.com>

**无锡市顺晟工业制带有限公司**  
Wuxi Shun Sheng Industry Belt Manufacturing Co.,Ltd

## BRILLIANT COURSE

顺晟制带 

辉煌历程 铸就梦想

### 企业简介

坐落于江苏省无锡市的顺晟工业制带有限公司（简称顺晟）是国内知名的工业输送带制造商。自2003年成立至今，在顺晟200多名员工的共同努力下，我们已研发出300多种产品，并拥有约35000平方米的现代化厂房。我们的输送带已经通过ISO9001：2000质量体系认证，并且出口至多个国家，如：美国、英国、荷兰、韩国、土耳其、印度、巴西等国。

顺晟积极实行生产线垂直整合战略，自主拉丝，织布与皮带生产，这样不仅能严格保证质量，而且能缩减成本。目前我们拥有4台单丝挤出机，4台捻线机，2台整经机，33台织布机和5条输送带生产线，其中2条3米线，3条2米线。本公司可按客户要求生产不同规格、花纹的PVC，TPU，PE轻型输送带。我们的产品能满足各行业不同领域的需求，例如：烟草，食品，物流，电子，医药，造纸，木材加工等行业。

顺晟的核心价值观是“精益求精”。未来，我们将秉持这一信念，积极应对全球输送带行业日新月异挑战。

### COMPANY INTRODUCTION

Wuxi Shun Sheng Industry Belt Manufacturing Company, located in Wuxi, Jiangsu province, has achieved widespread fame in the domestic industry belt manufacturing industry. With the help of 200 employees, Shun Sheng has invented and produced over 300 types of product and has also built modern factories which have an area of approximately 35,000 square meters since the year 2003 when it was established. The quality of the industry belt made by our company is guaranteed by ISO9001:2000. Our company's products have been exported to many countries, for example, America, Britain, Holland, South Korea, Turkey, India and Brazil.

The strategy of vertical integration of production lines has been fully implemented in Shun Sheng, that is to say, monofilament-drawing, weaving and belt manufacturing are all processed in our factories. This strategy not only ensures the quality of our product, but also minimizes the cost. At present, our company has 4 draw-benches, 4 twisting frames, 2 warping machines, 33 weaving looms and 5 belt production lines which includes 2 with 3000mm width and 3 with 2000mm width. Our company is able to manufacture PVC, TPU and PE light conveyor belt in different sizes and patterns based on customers' special requirements. Our products can meet the needs in many industries, for instance, tobacco industry, food industry, logistics industry, electronic industry, pharmaceutical industry, paper-making industry and wood processing industry.

Constant striving for perfection is our company's core value. We will always preserve this value and respond to challenges actively in the global belt industry.



## 输送带型号编注说明 Interpretation of Belt Code

示例/Example

2

织物层数

1

带体颜色

P

表面花纹

2

带体厚度

K

涂层特性

/

A

织物特性

■ 第一位数字表示布层层数：

The first number stands for ply number:

- |          |                |
|----------|----------------|
| 1: 1层布   | 1: one ply     |
| 2: 2层布   | 2: two plies   |
| 3: 3层布   | 3: three plies |
| 4: 4层布   | 4: four plies  |
| ... 以此类推 | ... and so on  |

■ 第二位数字表示带体颜色：

The second number stands for belt's color:

- |        |        |                 |                |
|--------|--------|-----------------|----------------|
| 1: 绿色  | 7: 蓝绿色 | 1: green        | 7: dark green  |
| 2: 白色  | 8: 天蓝色 | 2: white        | 8: sky blue    |
| 3: 蓝黑色 | 9: 橙色  | 3: petrol green | 9: orange      |
| 4: 黑色  | 10: 黄色 | 4: black        | 10: yellow     |
| 5: 灰色  | 0: 透明  | 5: grey         | 0: transparent |
| 6: 深灰色 |        | 6: dark grey    |                |

■ 第三位字母表示表面花纹：

The third letter stands for surface pattern:

- |            |                            |
|------------|----------------------------|
| P: 平面纹     | P: smooth                  |
| S: 钻石纹     | S: diamond                 |
| JZ: 锯齿纹    | JZ: saw tooth              |
| JZT: 锯齿双向纹 | JZT: both way saw tooth    |
| C: 草带花纹    | C: rough top               |
| V: 雾面      | V: matt                    |
| FC: 方格草带   | FC: squire rough top       |
| Z: 直条纹     | Z: stripe                  |
| YD: 圆凸纹    | YD: tobacco belt           |
| G: 工字纹     | G: I-shaped                |
| XG: 新工字纹   | XG: new I-shaped           |
| D: 圆点花纹    | D: dot                     |
| L: 菱形花纹    | L: lozenge                 |
| W: 表面无PCV层 | W: without PVC coat        |
| SG: 砂光机带   | SG: checker                |
| GL: 高尔夫纹   | GL: golf                   |
| BC: 波浪草带纹  | BC: wave rough top         |
| RZ: 人字形纹   | RZ: herringbone            |
| B: 跑步机带纹   | B: treadmill               |
| FBC: 方格波浪纹 | FBC: squire wave rough top |
| CB: 粗布纹    | CB: mini-grip              |
| YL: 月牙纹    | YL: crescent               |
| YZ: 一字纹    | YZ: "—" pattern            |
| DD: 锭带     | DD: tape                   |
| MJ: 麻将机纹   | MJ: maJiang                |
| N: 枕芯带     | N: solid-woven             |
| BW: 布纹带    | BW: fabric pattern         |
| YY: 预压机    | YY: preforming press       |
| CY: 搓衣板    | CY: sort tooth             |
| PU: PU带    | PU: PU belt                |

■ 第四位数字表示带体的基准厚度：

The fourth number stands for belt's thickness:

- |        |          |        |               |
|--------|----------|--------|---------------|
| 1: 1mm | 4: 4mm   | 1: 1mm | 4: 4mm        |
| 2: 2mm | 5: 5mm   | 2: 2mm | 5: 5mm        |
| 3: 3mm | ... 以此类推 | 3: 3mm | ... and so on |

■ 若第五位无标注则表示涂层为正常规格。如有标注，代码含义如下：  
If there's no letter in the fifth place, it means coatings are in normal. If not, the fifth letter stands for coating's special feature:

- |        |       |               |                   |
|--------|-------|---------------|-------------------|
| K: 抗静电 | R: 加软 | K: antistatic | R: more flexible  |
| H: 加厚  | Z: 阻燃 | H: thicker    | Z: fire-resistant |
| Y: 加硬  | N: 耐油 | Y: harder     | N: oil-resistant  |
| S: 深花纹 | C: 耐寒 | S: deeper     | C: cold-resistant |

■ 若第六位无标注，则表示织物为正常规格。如有标注，代码含义如下：  
If there's no letter in the sixth place, it means fabric is in normal. If not, the sixth letter stands for fabric's special feature:

- |        |        |                 |              |
|--------|--------|-----------------|--------------|
| S: 软布  | D: 低噪音 | S: flexible     | D: low-noise |
| F: 芳纶布 | X: 斜纹布 | F: aramid fiber | X: jogger    |
| MZ: 毛毡 | MD: 棉布 | MZ: felt        | MD: cotton   |

PVK带算作单独一类

示例/Example: P130

以P130的PVK布做成的PVK带

The code of PVK belt is unique. For example, P130 means the PVK belt is made of P130 fabric.

注：我公司产品多达300种以上，以上所列产品为常用规格，如有特殊要求可联系销售人员。


Note: Our company has more than 300 types of product. The listed products are in normal sizes. If you have any special requirement, please feel free to contact our sales people.



1. Twisting frame
2. Draw-bench
3. Tensile test
4. Warping machine
5. Warehouse
6. Lab
7. Weaving workshop

# OUR PRODUCTS

顺晟制带  产品

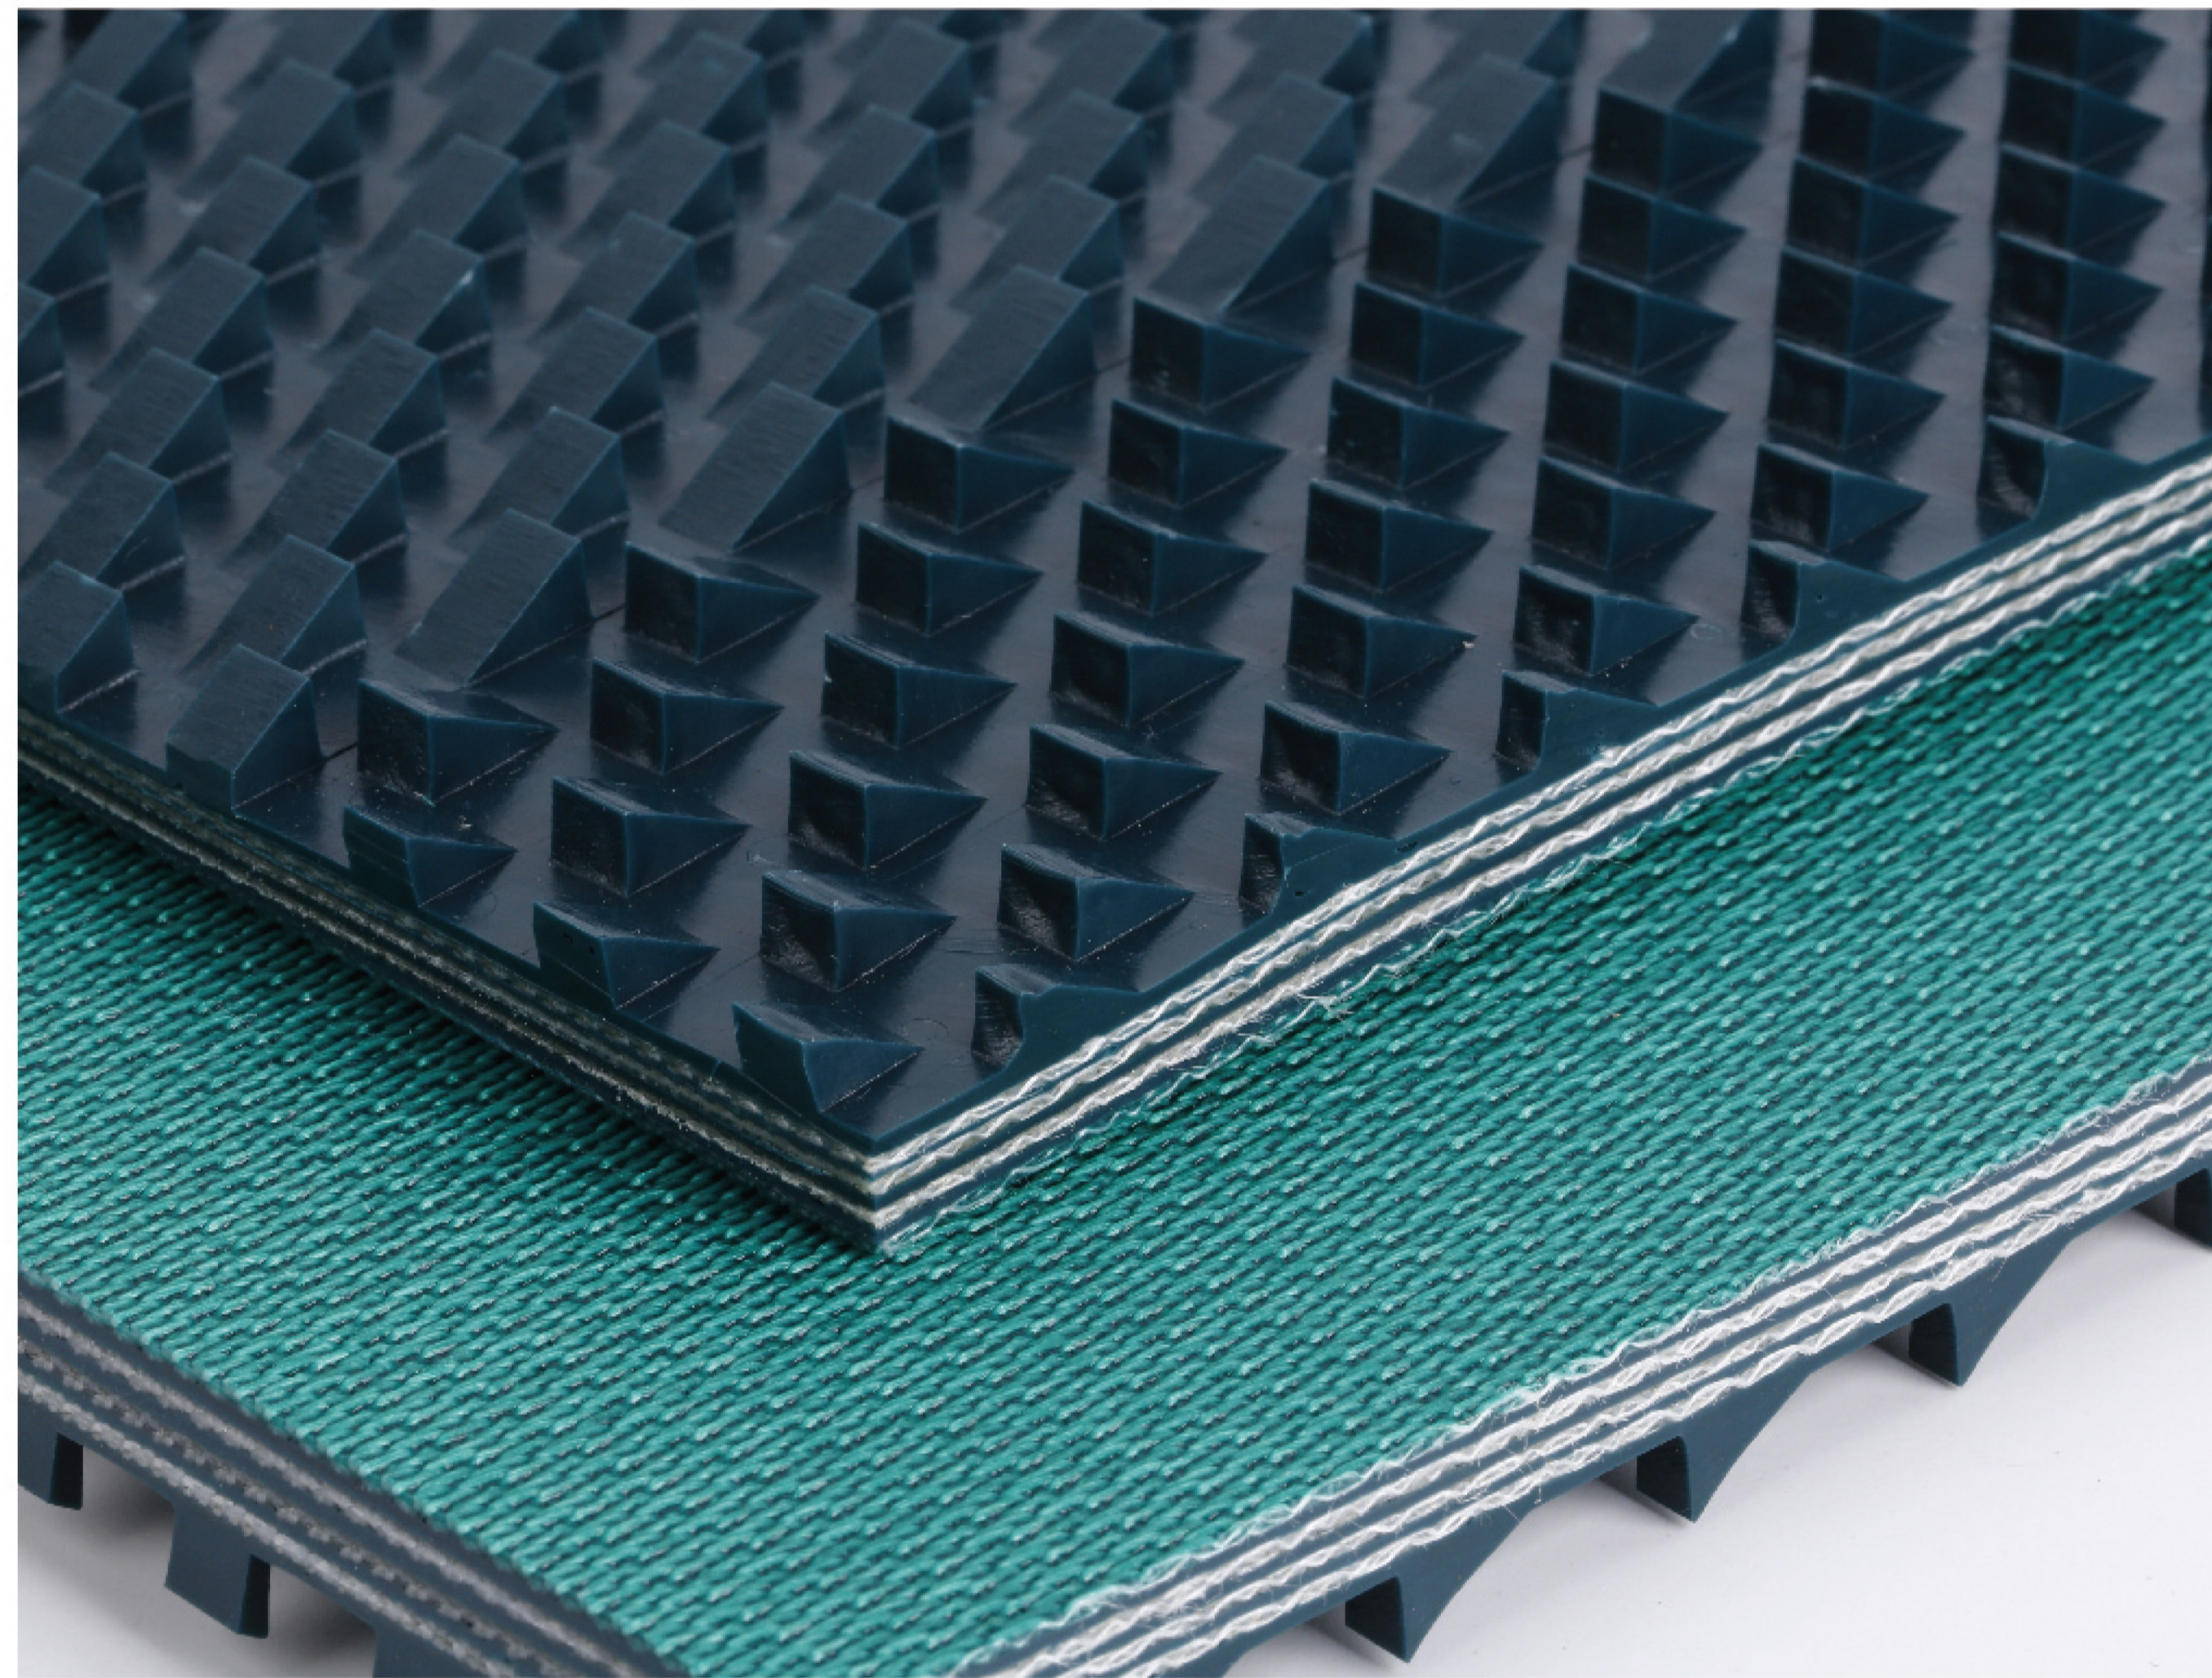

43L9

14PUDDO.75


43JZT12




34YZ9

34SG9


33Y6

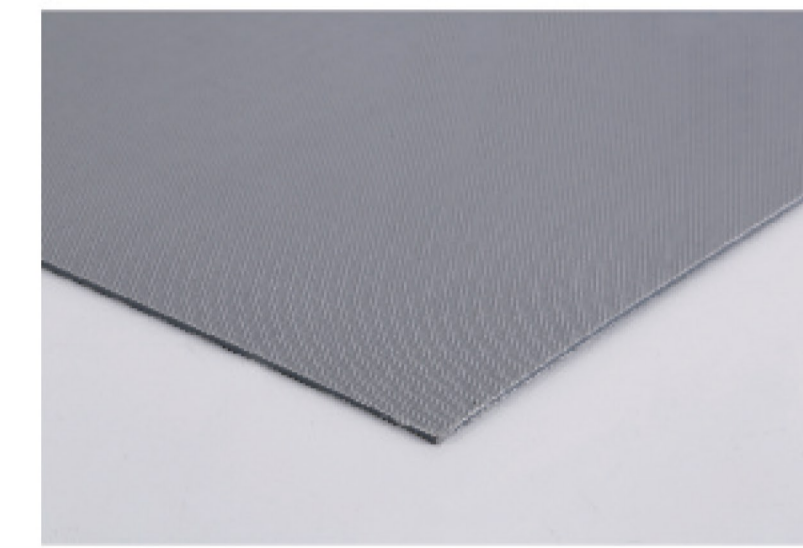


25W2

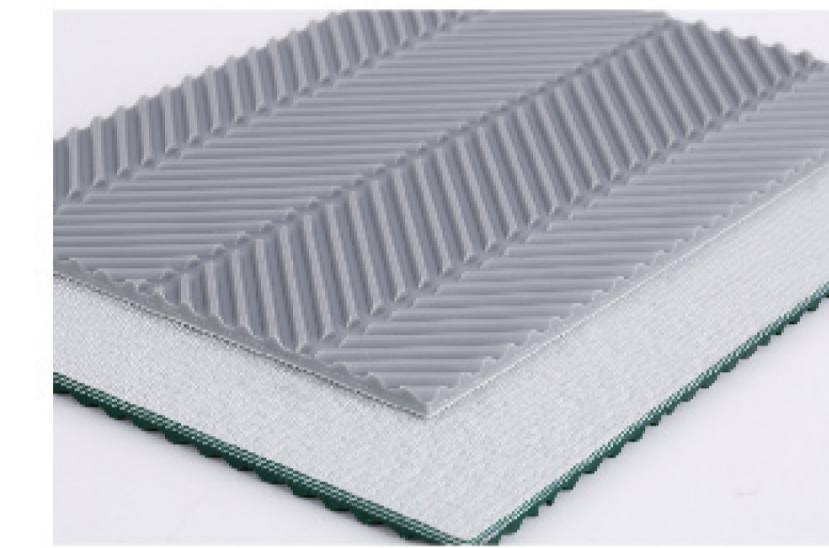


25RZ5

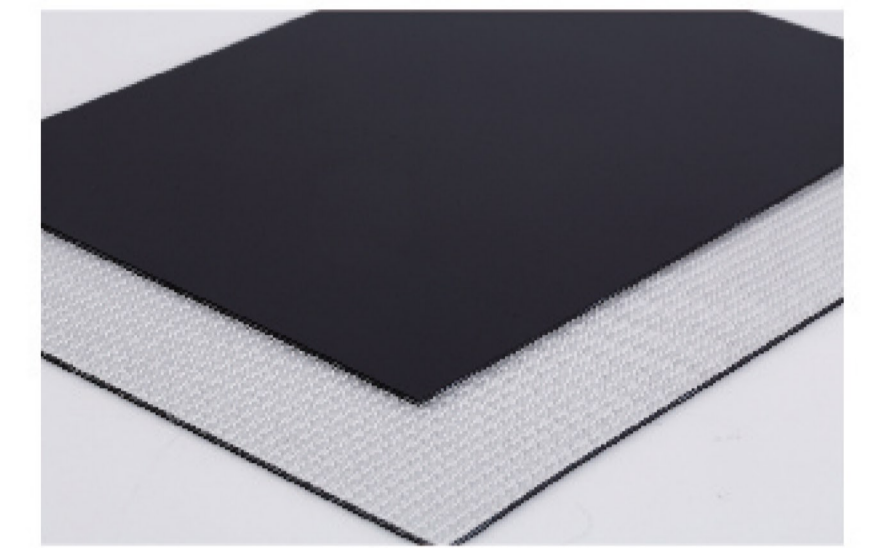


24V2

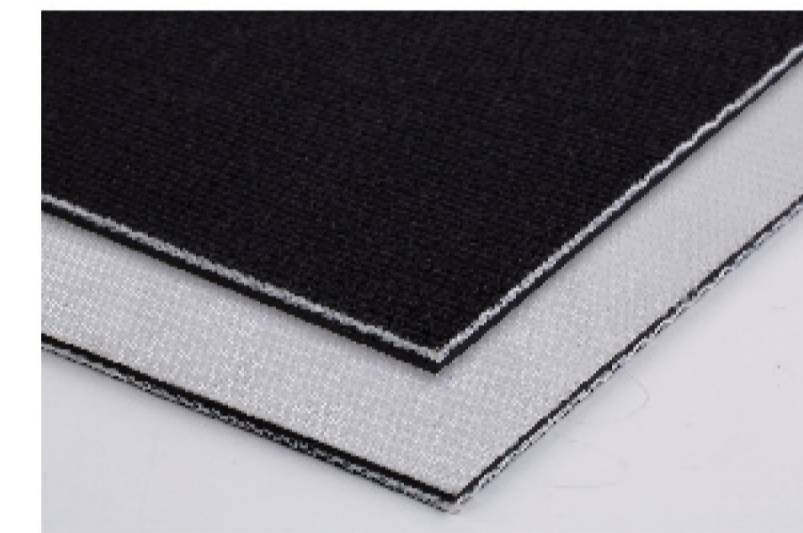


24N4

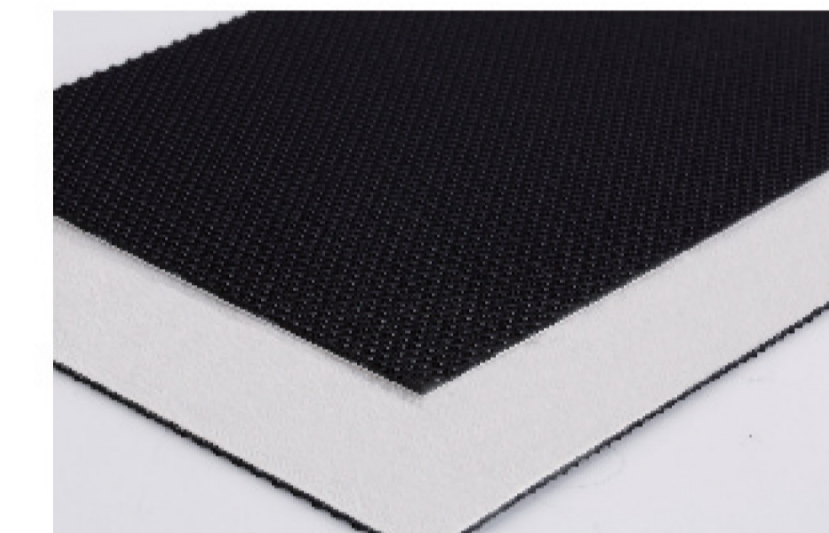


24GL2.5

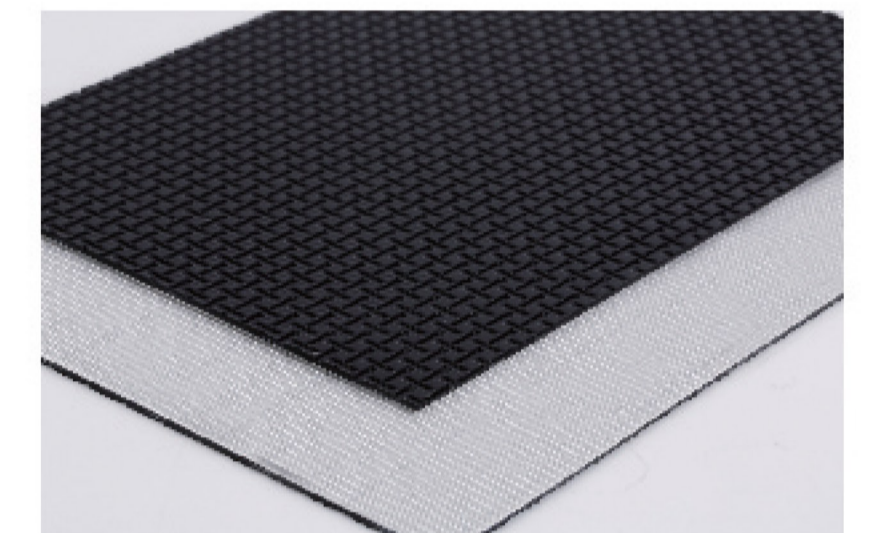


24G3

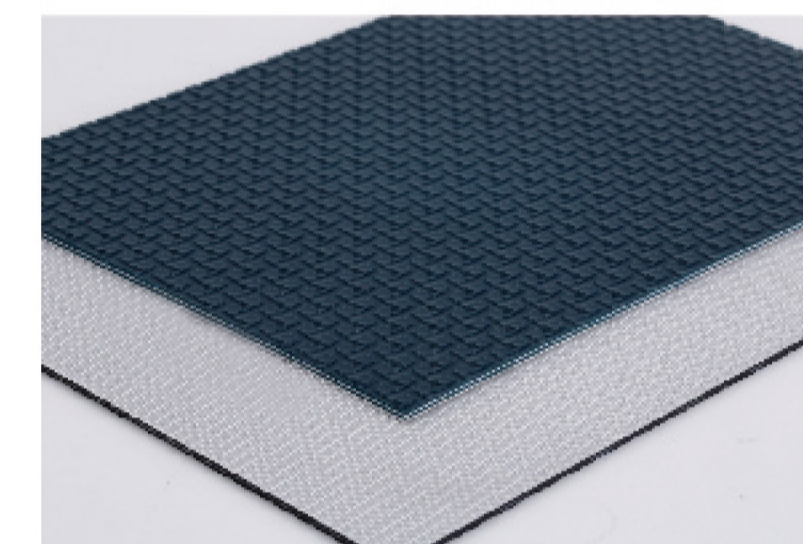

23XG3

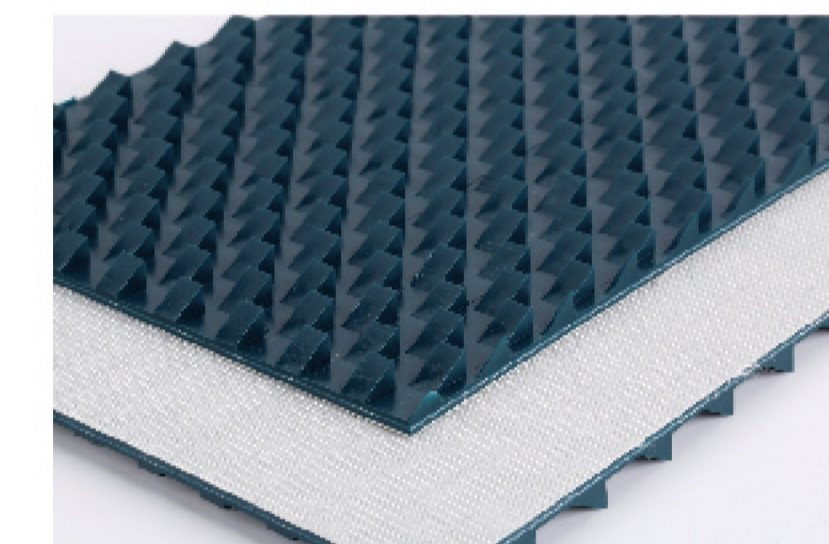

23JZ8

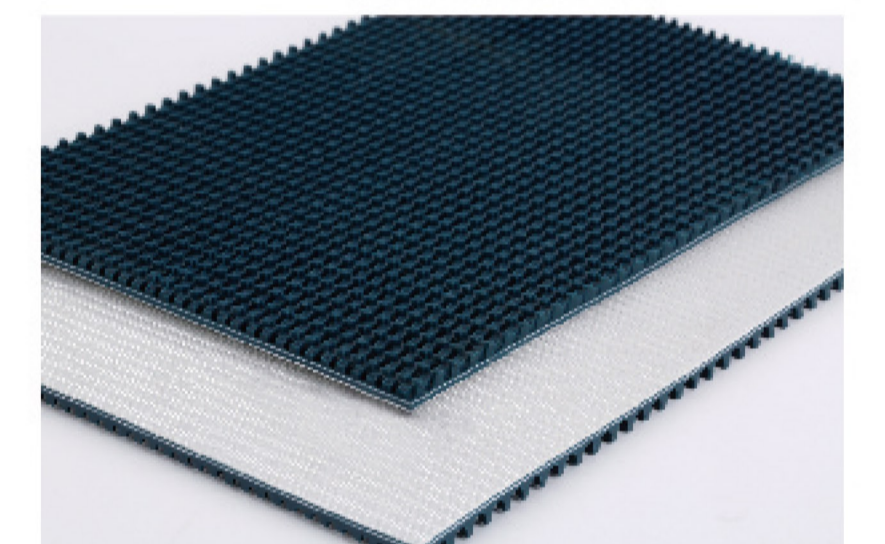


23FC6



24S3




24BW2.8

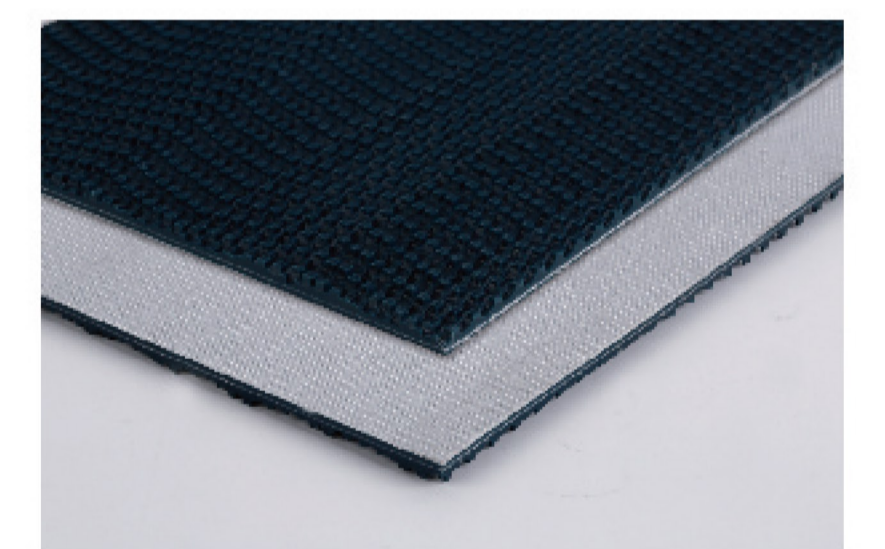


23FBC5



PVK

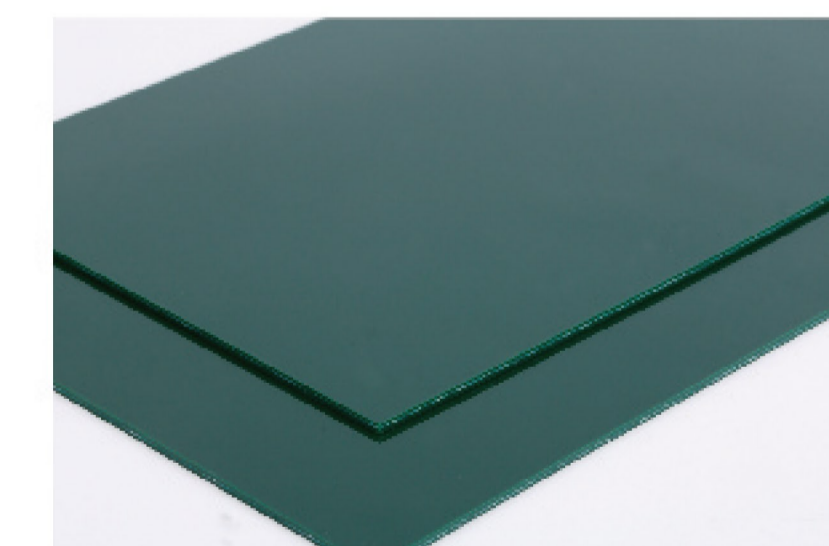


11PP2

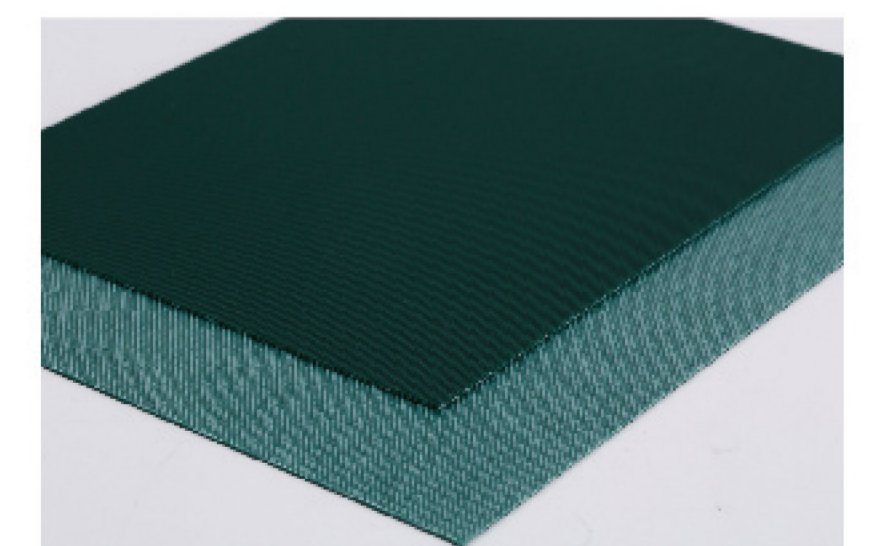

11PUMJ1.05

# OUR PRODUCTS

顺晟制带  产品

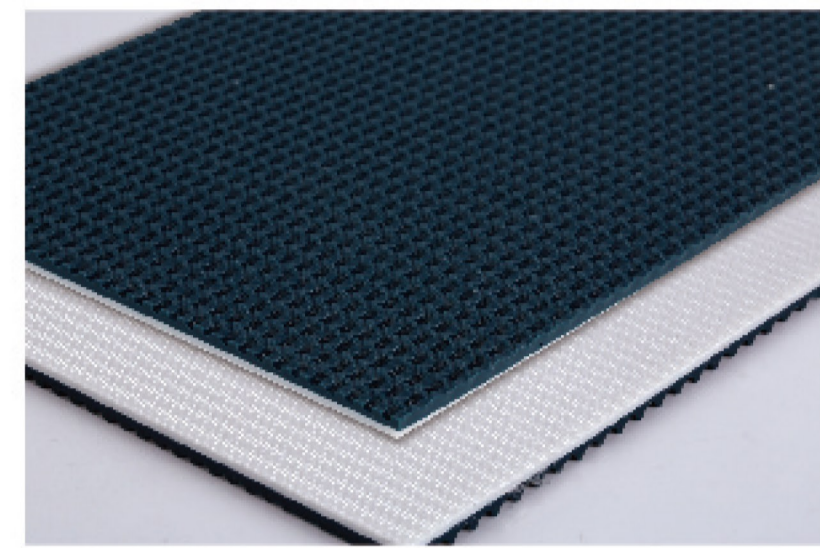

23B5



22YL6



22W1.8MD




34W3MZ




12DI.8MD



PE

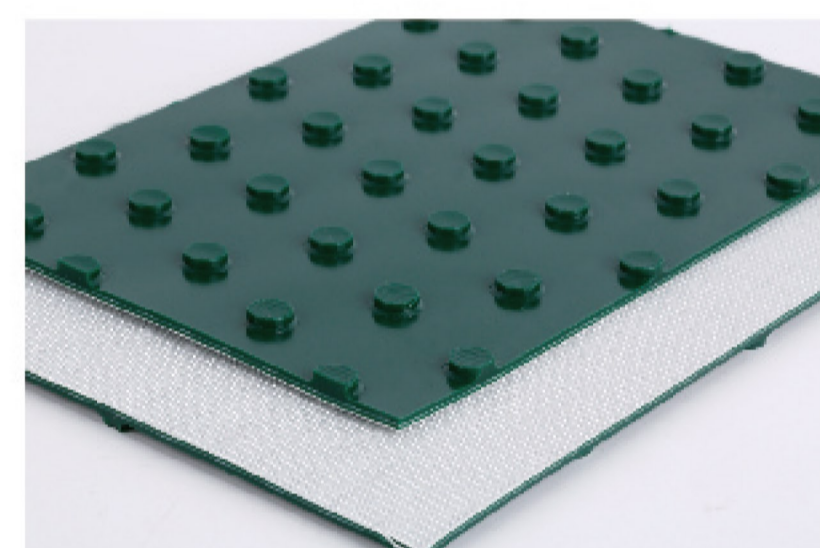


21YD6

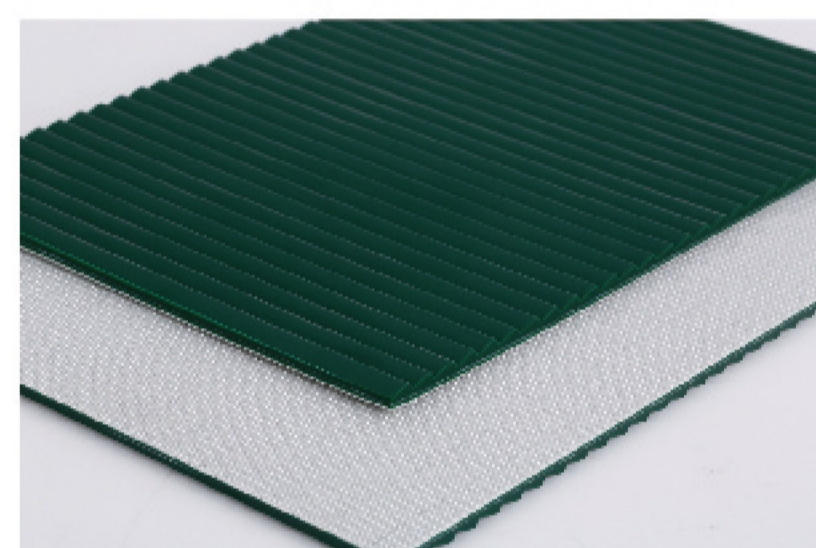


21CY4.5




21C5

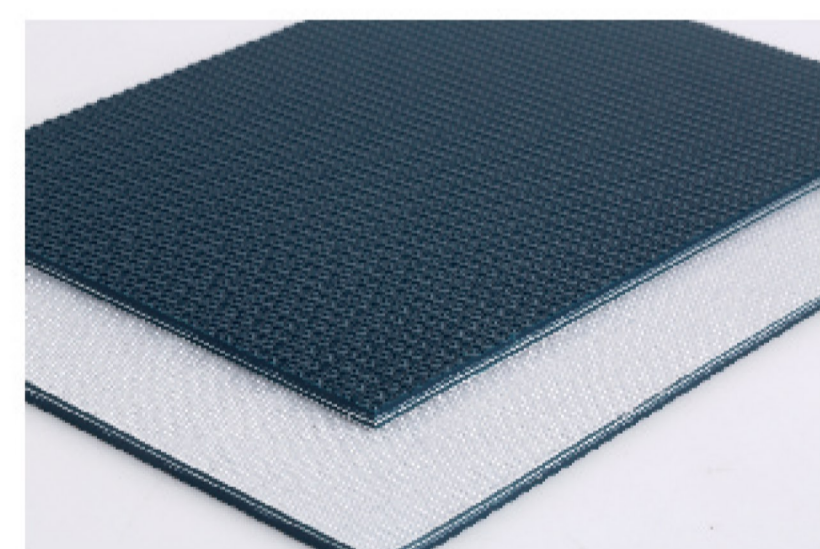


33L5

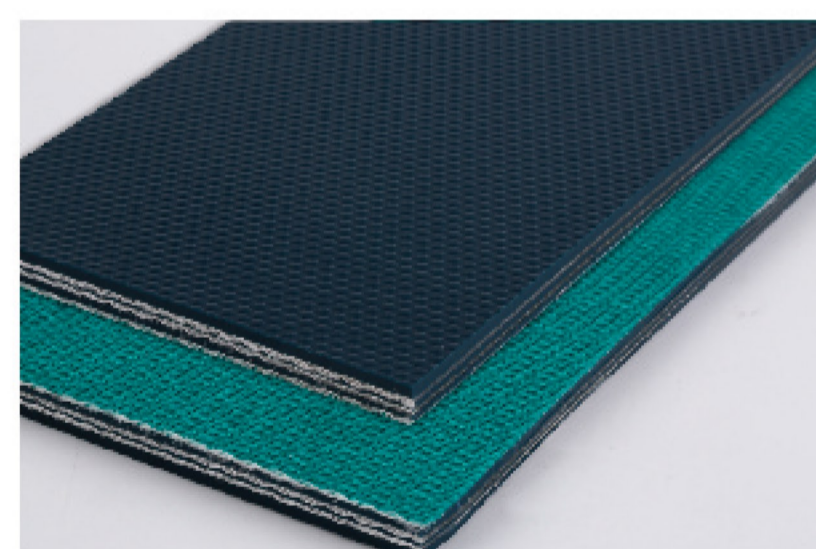


33D7

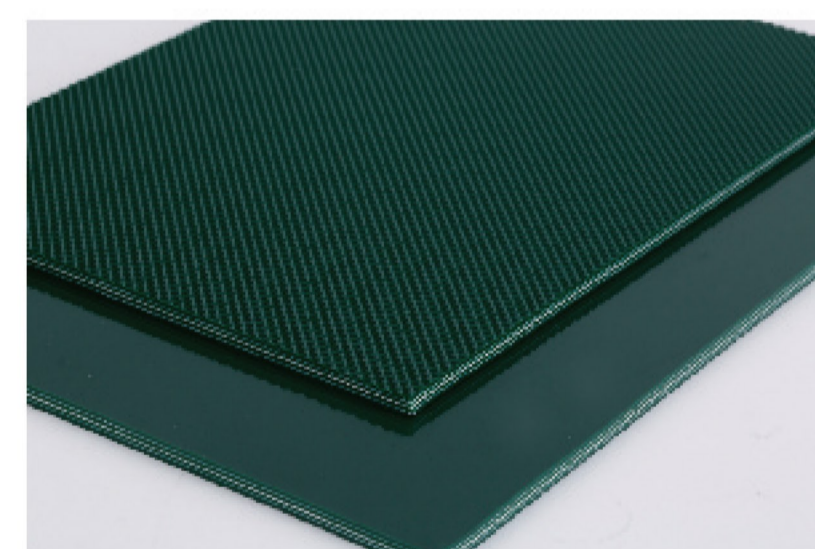


31PS4.5

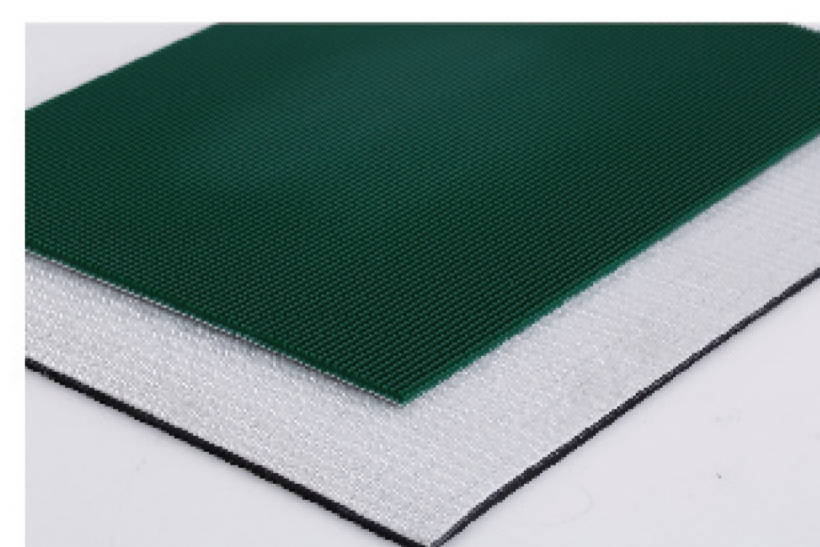

21Z3

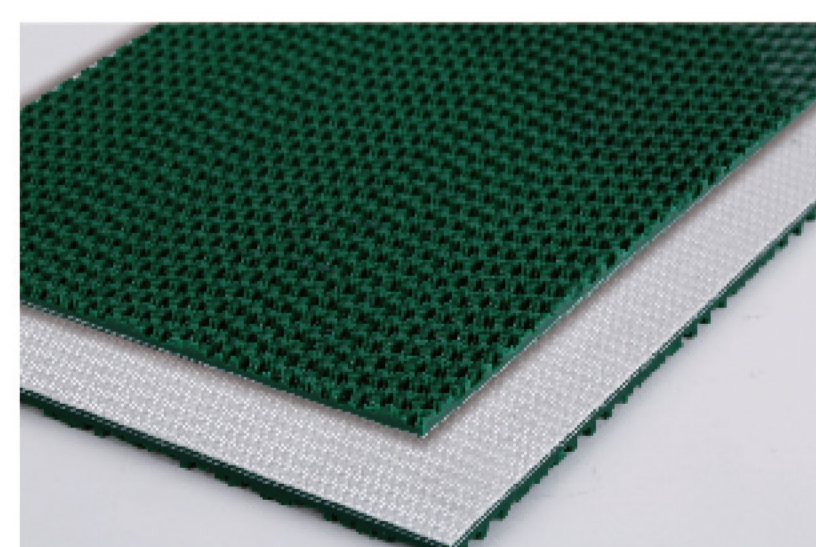

21BC4.5

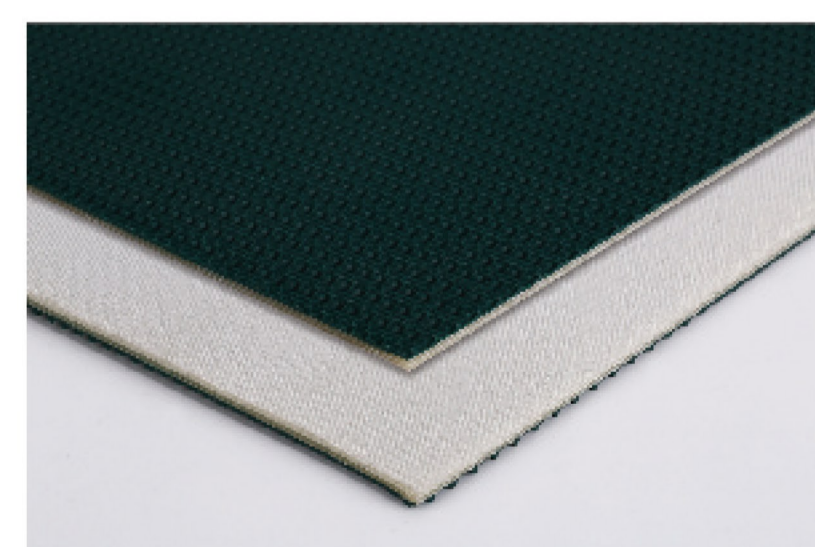

31CB3.5

# APPLICATION

顺晟制带  应用

07/08

Wuxi Shun Sheng Industry Belt Manufacturing Company

PAGE



精心研发 开创新局

# PARAMETER

## 顺晟制带 参数表

型号 Belt code	输送面 Top cover					摩擦面 Bottom cover		工作温度 Working temperature °C	织物层数 No. of plies	带体厚度Belt thickness mm	重量 Weight kg/m <sup>2</sup>	拉力强度 Breakingload N/mm	延伸力 Working load at 1% elongation N/mm	最小滚轮直径 Minimum pulley diameter mm	最大宽度 Max roll width mm	备注 Notes	型号 Belt code
	材料 Material	颜色 Color	厚度 Thickness mm	花纹 Pattern	硬度 Hardness °shA	颜色 Color	花纹 Pattern										
11PUMJ1.05	PU	Green 绿色	0.5	Fabric	90	/	/	-10/+80	1	1.05	1.2	≥50	≥4	10	2100		11PUMJ1.05
12PU0.8	PU	White 白色	0.2	Smooth	90	/	/	-10/+80	1	0.8	1	≥100	≥8	10	3000		12PU0.8
14PUDD0.75	PU	Black 黑色	0.5	Tape	80	Green 绿色	Cotton	-10/+80	1	0.75	0.9	≥50	≥4	10	1750		14PUDD0.75
22PU1.4	PU	White 白色	0.2	Smooth	90	/	/	-10/+80	2	1.4	1.7	≥100	≥8	20	3000		22PU1.4
22PU1.5/S	PU	White 白色	0.5	Smooth	90	/	/	-10/+80	2	1.5	1.8	≥100	≥8	30	3000	Flexible fabric	22PU1.5/S
22PU2	PU	White 白色	0.5	Smooth	90	/	/	-10/+80	2	2	2.5	≥100	≥8	30	3000		22PU2
22PUS1.8	PU	White 白色	1.5	Diamond	90	/	/	-10/+80	2	1.8	1.8	≥100	≥8	60	3000		22PUS1.8
28PUV1.5	PU	Sky blue 天蓝	0.7	Matt	90	/	/	-10/+80	2	7.5	1.8	≥100	≥8	30	3000		28PUV1.5
31PUCB3.5	PU	Green 绿色	3	mini-grip	90	/	/	-10/+80	3	3.5	3.96	≥200	≥15	60	2000		31PUCB3.5
33PUS3.2	PU	Petrol green 蓝黑色	1	Diamond	90	/	/	-10/+80	3	3.2	3.72	≥150	≥12	60	3000		33PUS3.2
33PUV3	PU	Petrol green 蓝黑色	0.5	Smooth	90	/	/	-10/+80	3	3	3.8	≥150	≥18	60	3000		33PUV3
34PUV2.9/D	PU	Black 黑色	0.7	Matt	90	/	/	-10/+80	3	2.9	3.48	≥150	≥12	60	3000		34PUV2.9/D
11C4	PVC	Green 绿色	3.5	Rough top	75	/	/	-10/+80	1	4	3.44	≥50	≥4	40	3000		11C4
11P1	PVC	Green 绿色	0.4	Smooth	75	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		11P1
11QB5	PVC	Green 绿色	2.4	Smooth	70	Green 绿色	Smooth	-10/+80	1	5	5.2	≥80	≥6	/	3000	裙边带 Side wall	11QB5
11S1	PVC	Green 绿色	0.4	Diamond	75	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		11S1
12D1.8/MD	PVC	White 白色	0.9	Dot	75	/	Cotton	-10/+80	1	1.8	1.3	≥80	≥5	40	3000		12D1.8/MD
12P1	PVC	White 白色	0.4	Smooth	65	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		12P1
12P1.5/MD	PVC	White 白色	0.7	Smooth	75	/	Cotton	-10/+80	1	1.5	1.3	≥80	≥5	40	3000		12P1.5/MD
12S1	PVC	White 白色	0.4	Diamond	65	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		12S1
13GL3.2	PVC	Petrol green 蓝黑色	1	Golf	75	/	/	-10/+80	1	3.2	3.6	≥50	≥4	20	3000		13GL3.2
14P1	PVC	Black 黑色	0.4	Smooth	75	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		14P1
14S1	PVC	Black 黑色	0.4	Diamond	75	/	/	-10/+80	1	1	1.1	≥50	≥4	20	3000		14S1
14YL6	PVC	Black 黑色	3	Crescent	75	/	/	-10/+80	1	6	4.65	≥50	≥4	20	2000		14YL6
15MJ0.9	PVC	Grey 灰色	0.5	Majiang	75	Grey 灰色	/	-10/+80	1	0.9	1.08	≥40	≥3	10	2000		15MJ0.9
17BW1	PVC	Dark green 蓝绿色	0.1	Fabric pattern	70	Dark green 蓝绿色	Fabric pattern	-10/+80	1	1	1.1	≥50	≥6	40	3000		17BW1
210P2	PVC	Green 绿色	0.5	Smooth	75	/	/	-10/+80	2	2	4.56	≥100	≥8	40	2000		210P2
21BC5	PVC	Green 绿色	3.5	Wave rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	2000		21BC5
21C4S	PVC	Green 绿色	3.5	Rough top	75	/	/	-10/+80	2	4	1.98	≥100	≥8	40	2000		21C4S
21C5	PVC	Green 绿色	3.5	Rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	3000		21C5
21FBC5	PVC	Green 绿色	3.5	Squire wave rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	2000		21FBC5
21FC6	PVC	Green 绿色	4.5	Squire rough top	60	/	/	-10/+80	2	6	5.3	≥100	≥8	60	2000		21FC6
21GL2.3	PVC	Green 绿色	1	Golf	75	/	/	-10/+80	2	2.3	1.68	≥100	≥8	40	2000		21GL2.3
21P2	PVC	Green 绿色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		21P2
21P2K	PVC	Green 绿色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		21P2K
21P2/S	PVC	Green 绿色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000	Flexible fabric	21P2/S
21P3	PVC	Green 绿色	1	Smooth	75	/	/	-10/+80	2	3	3.7	≥100	≥8	60	3000		21P3
21P3C	PVC	Green 绿色	1	Smooth	65	/	/	-10/+80	2	3	3.6	≥100	≥8	40	3000		21P3C
21P3K	PVC	Green 绿色	1	Smooth	75	/	/	-10/+80	2	3	3.7	≥100	≥8	60	3000		21P3K
21P3K	PVC	Green 绿色	1	Smooth	75	/	/	-10/+80	2	3	3.12	≥100	≥8	40	3200		21P3K
21P4	PVC	Green 绿色	1.8	Smooth	75	/	/	-10/+80	2	4	4.82	≥100	≥8	60	3000		21P4

# PARAMETER

## 顺晟制带 参数表

型号 Belt code	输送面 Top cover					摩擦面 Bottom cover		工作温度 Working temperature °C	织物层数 No. of plies	带体厚度Belt thickness mm	重量 Weight kg/m <sup>2</sup>	拉力强度 Breakingload N/mm	延伸力 Working load at 1% elongation N/mm	最小滚轮直径 Minimum pulley diameter mm	最大宽度 Max roll width mm	备注 Notes	型号 Belt code
	材料 Material	颜色 Color	厚度 Thickness mm	花纹 Pattern	硬度 Hardness °shA	颜色 Color	花纹 Pattern										
21PS3	PVC	Green 绿色	0.6	Smooth	75	Green 绿色	Diamond	-10/+80	2	3	3.76	≥120	≥8	80	3000		21PS3
21S2	PVC	Green 绿色	0.7	Diamond	75	/	/	-10/+80	2	2	2.76	≥100	≥8	40	3000		21S2
21V2	PVC	Green 绿色	0.5	Matt	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		21V2
21YD6	PVC	Green 绿色	4.5	Tobacco belt	75	/	/	-10/+80	2	6	4.34	≥100	≥8	60	2000		21YD6
21Z3	PVC	Green 绿色	0.9	Stripe	60	/	/	-10/+80	2	3	3.5	≥120	≥8	60	2000		21Z3
22W2/MD	PVC	/	0.2	Cotton	/	/	Cotton	-10/+80	2	2	2.2	≥120	≥10	40	1800/2800		22MD2
22P2	PVC	White 白色	0.5	Smooth	65	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000	食品带 For food	22P2
22P2K	PVC	White 白色	0.5	Smooth	75	/	/	-10/+80	2	2	1.98	≥100	≥8	40	3200		22P2K
22P3	PVC	White 白色	1	Smooth	65	/	/	-10/+80	2	3	3.7	≥100	≥8	60	3000	食品带 For food	22P3
22PS2.2	PVC	White 白色	0.45	Smooth	75	White 白色	Diamond	-10/+80	2	2.2	1.98	≥100	≥8	40	3200		22PS2.2
22PS3	PVC	White 白色	0.6	Smooth	65	White 白色	Diamond	-10/+80	2	3	3.76	≥120	≥8	80	3000	食品带 For food	22PS3
22RZ5	PVC	White 白色	3	Herringbone	70	/	/	-10/+80	2	5	5.5	≥100	≥12	20	2000		22RZ5
22S2	PVC	White 白色	0.7	Diamond	65	/	/	-10/+80	2	2	2.76	≥100	≥8	40	3000	食品带 For food	22S2
22W1.3	PVC	/	0.1	/	/	/	/	-10/+80	2	1.3	1.5	≥100	≥8	40	3000		22W1.3
22W1.8	PVC	/	0.1	/	/	/	/	-10/+80	2	1.8	2.16	≥100	≥8	40	3200		22W1.8
22YD6	PVC	White 白色	4.5	Tobacco belt	65	/	/	-10/+80	2	6	4.34	≥100	≥8	60	2000		22YD6
23B5/D	PVC	Petrol green 蓝黑色	3	Treadmill	65	/	/	-10/+80	2	5	3.9	≥150	≥12	60	2000		23B5/D
23BC5	PVC	Petrol green 蓝黑色	3.5	Wave rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	2000		23BC5
23C5	PVC	Petrol green 蓝黑色	3.5	Rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	3000		23C5
23FC6	PVC	Petrol green 蓝黑色	4	Squire rough top	75	/	/	-10/+80	2	6	2.4	≥100	≥8	60	3000		23FC6
23G3	PVC	Petrol green 蓝黑色	1	I-shaped	75	/	/	-10/+80	2	3	2.5	≥100	≥8	40	2000		23G3
23JZ9	PVC	Petrol green 蓝黑色	6.5	Saw tooth	70	/	/	-10/+80	2	9	6.4	≥400	≥22	100	2500		23JZ9
23P2	PVC	Petrol green 蓝黑色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		23P2
23P3	PVC	Petrol green 蓝黑色	1	Smooth	75	/	/	-10/+80	2	3	3.7	≥100	≥8	60	3000		23P3
23P4	PVC	Petrol green 蓝黑色	1.8	Smooth	75	/	/	-10/+80	2	4	4.82	≥100	≥8	60	3000		23P4
23PC5	PVC	Petrol green 蓝黑色	1	Smooth	65	Petrol green 蓝黑色	Rough top	-10/+80	2	5	3.72	≥100	≥8	40	2000		23PC5
23PS3	PVC	Petrol green 蓝黑色	0.6	Smooth	75	Petrol green 蓝黑色	Diamond	-10/+80	2	3	3.76	≥120	≥8	80	3000		23PS3
23V2	PVC	Petrol green 蓝黑色	0.5	Matt	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		23V2
23VG3	PVC	Petrol green 蓝黑色	0.8	Golf	75	Petrol green 蓝黑色	Matt	-10/+80	2	3	3.9	≥50	≥5	40	2000		23VG3
23YD6	PVC	Petrol green 蓝黑色	4.5	Tobacco belt	75	/	/	-10/+80	2	6	4.34	≥100	≥8	60	2000		23YD6
23YL6	PVC	Petrol green 蓝黑色	3	Crescent	65	/	/	-10/+80	2	6	3.12	≥100	≥8	40	3000		23YL6
24C5	PVC	Black 黑色	3.5	Rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	3000		24C5
24FC6	PVC	Black 黑色	4.5	Squire rough top	60	/	/	-10/+80	2	6	5.3	≥100	≥8	60	2000		24FC6
24G3	PVC	Black 黑色	1	I-shaped	75	/	/	-10/+80	2	3	2.5	≥100	≥8	40	2000	1500D	24G3
24N4	PVC	Black 黑色	0.1	Solid-woven	75	/	/	-10/+80	2	4	4.8	≥100	≥8	40	2000		24N4
24P2	PVC	Black 黑色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		24P2
24P3	PVC	Black 黑色	1	Smooth	75	/	/	-10/+80	2	3	3.7	≥100	≥8	60	3000		24P3
24PS3	PVC	Black 黑色	0.6	Smooth	75	Black 黑色	Diamond	-10/+80	2	3	3.76	≥120	≥8	80	3000		24PS3
24S2	PVC	Black 黑色	0.7	Diamond	75	/	/	-10/+80	2	2	2.76	≥100	≥8	40	3000		24S2
24V2	PVC	Black 黑色	0.5	Matt	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		24V2
24W3.2/S	PVC	Black 黑色	0.1	/	/	Black 黑色	/	-10/+80	2	3.2	3.84	≥150	≥12	80	3000	Flexible fabric	24W3.2/S
24XG3	PVC	Black 黑色	1	New I-shaped	75	/	/	-10/+80	2	3	2.5	≥100	≥8	40	3000		24XG3

# PARAMETER

## 顺晟制带 参数表

型号 Belt code	输送面 Top cover					摩擦面 Bottom cover		工作温度 Working temperature °C	织物层数 No. of plies	带体厚度Belt thickness mm	重量 Weight kg/m <sup>2</sup>	拉力强度 Breakingload N/mm	延伸力 Working load at 1% elongation N/mm	最小滚轮直径 Minimum pulley diameter mm	最大宽度 Max roll width mm	备注 Notes	型号 Belt code
	材料 Material	颜色 Color	厚度 Thickness mm	花纹 Pattern	硬度 Hardness °shA	颜色 Color	花纹 Pattern										
24Z3	PVC	Black 黑色	0.9	Stripe	60	/	/	-10/+80	2	3	3.5	≥120	≥8	60	2000		24Z3
25FBC5	PVC	Grey 灰色	3.5	Squire wave rough top	60	/	/	-10/+80	2	5	5.25	≥100	≥8	60	2000		25FBC5
25L2	PVC	Grey 灰色	0.8	Lozenge	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	2000		25L2
25LD2	PVC	Grey 灰色	2	Lozenge	75	/	/	-10/+80	2	2	1.68	≥100	≥8	40	3000		25LD2
25Z3	PVC	Grey 灰色	0.9	Stripe	60	/	/	-10/+80	2	3	3.5	≥120	≥8	60	2000		25Z3
26V2	PVC	Dark grey 深灰色	0.5	Matt	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		26V2
27P2	PVC	Dark green 蓝绿色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000		27P2
28P2	PVC	Blue 天蓝色	0.5	Smooth	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000	食品带 For food	28P2
28V2	PVC	Sky blue 天蓝色	0.5	Matt	75	/	/	-10/+80	2	2	2.5	≥100	≥8	40	3000	食品带 For food	28V2
29W2/S	PVC	Orange 橙色	0.1	/	/	Orange 橙色	/	-10/+80	2	2	2.4	≥100	≥10	40	3000	Auto door	29W2/S
31FC7	PVC	Green 绿色	4.5	Squire rough top	60	/	/	-10/+80	3	7	7.2	≥150	≥12	80	2000		31FC7
31P4	PVC	Green 绿色	1	Smooth	75	/	/	-10/+80	3	4	4.82	≥150	≥12	80	3000		31P4
31PS5	PVC	Green 绿色	0.9	Smooth	75	Green 绿色	Diamond	-10/+80	3	5	6	≥150	≥12	100	3000		31PS5
31SV4.5	PVC	Green 绿色	1.5	Diamond	75	Green 绿色	Matt	-10/+80	3	4.5	5.22	≥150	≥12	80	3000		31SV4.5
32W3/MD	PVC	/	0.2	Cotton	/	/	Cotton	-10/+80	3	3	3.7	≥180	≥15	40	1800/2800		32MD3
32P4	PVC	White 白色	1	Smooth	65	/	/	-10/+80	3	4	4.82	≥150	≥12	80	3000	食品带 For food	32P4
33D7	PVC	Petrol green 蓝黑色	2	Dot	70	Green 绿色	/	-10/+80	3	7	7.6	≥680	≥30	150	2000		33D7
33GLGL9	PVC	Petrol green 蓝黑色	1	Golf	75	Petrol green 蓝黑色	Golf	-10/+80	3	9	10.56	≥150	≥12	100	2200		33GLGL9
33JZ12	PVC	Petrol green 蓝黑色	6.5	Saw tooth	70	Green 绿色	/	-10/+80	3	10	8.1	≥680	≥30	150	2500		33JZ12
33L7	PVC	Petrol green 蓝黑色	2	Lozenge	70	Green 绿色	/	-10/+80	3	7	7.6	≥680	≥30	150	2500		33L7
33P4	PVC	Petrol green 蓝黑色	1	Smooth	75	/	/	-10/+80	3	4	4.82	≥150	≥12	100	3000		33P4
33PS7	PVC	Petrol green 蓝黑色	2.5	Smooth	75	Petrol green 蓝黑色	Diamond	-10/+80	3	7	8.22	≥150	≥12	100	3000		33PS7
33V4	PVC	Petrol green 蓝黑色	0.7	Matt	75	/	/	-10/+80	3	4	4.44	≥150	≥12	80	3000		33V4
33YY6	PVC	Petrol green 蓝黑色	1.9	Preforming press	65	Green 绿色	/	-10/+80	3	6	7.26	≥150	≥12	100	2500		33YY6
34FC7	PVC	Black 黑色	4.5	Squire rough top	60	/	/	-10/+80	3	7	7.2	≥150	≥12	80	2000		34FC7
34SG9	PVC	Black 黑色	6	Checker	70	/	/	-10/+80	3	9	7.6	≥150	≥4	60	1200		34SG9
34W3/MZ	PVC	Black 黑色	2	Felt	80	/	/	-10/+80	2	3	3.7	≥80	≥7	20	1300		24MZ3
34W3Z	PVC	Black 黑色	0.1	/	/	/	/	-10/+80	3	3	3.6	≥150	≥12	80	2000	Fire-resistant	34W3Z
34W4/MZ	PVC	Black 黑色	2	Felt	80	/	/	-10/+80	2	4	4.9	≥80	≥7	20	1300		24MZ4
34YZSG9	PVC	Black 黑色	5.9	"—" pattern	65	Black 黑色	Checker	-10/+80	3	9	4.98	≥200	≥16	100	2100		34YZSG9
41P5	PVC	Green 绿色	1	Smooth	75	/	/	-10/+80	4	5	6.1	≥200	≥16	120	3000		41P5
43D9	PVC	Petrol green 蓝黑色	2.5	Dot	70	Green 绿色	/	-10/+80	4	9	9.9	≥800	≥45	150	2000		43D9
43JZ12	PVC	Petrol green 蓝黑色	6	Saw tooth	85	Green 绿色	/	-10/+80	4	12	10.74	≥800	≥45	200	2300		43JZ12
43JZT12	PVC	Petrol green 蓝黑色	6	Both way saw tooth	85	Green 绿色	/	-10/+80	4	12	10.74	≥800	≥45	200	2400		43JZT12
43L9	PVC	Petrol green 蓝黑色	2.5	Lozenge	70	Green 绿色	/	-10/+80	4	9	9.9	≥800	≥45	200	2500		43L9
43P5	PVC	Petrol green 蓝黑色	1	Smooth	75	/	/	-10/+80	4	5	6.1	≥200	≥16	120	3000		43P5
43PP8.5	PVC	Petrol green 蓝黑色	1	Smooth	75	Petrol green 蓝黑色	Smooth	-10/+80	4	8.5	10.26	≥200	≥16	80	3000		43PP8.5
43V6	PVC	Petrol green 蓝黑色	0.7	Matt	75	/	/	-10/+80	4	6	6.66	≥200	≥16	80	3000		43V6
44BC9/D	PVC	Black 黑色	3	Wave rough top	65	/	/	-10/+80	4	9	8.76	≥200	≥16	80	2000		44BC9/D
P125	PVK	Black 黑色	0.1	PVK	85	Black 黑色	/	-10/+80	1	3.5	3.9	≥200	≥21	80	2500		P125
P130	PVK	Black 黑色	0.1	PVK	85	Black 黑色	/	-10/+80	1	3.6	4	≥220	≥23	80	2500		P130
P150	PVK	Black 黑色	0.1	PVK	85	Black 黑色	/	-10/+80	1	4	4.2	≥260	≥25	100	2500		P150